




Feature:

- * Designed in USA, Made in China
- * Global Certificates.
- * Case Material: PC, GE brand
- * Fanless Design.
- * Fully sealed by ultrasonic welding.
- * Capacitor imported from Taiwan.
- * AC inlet: IEC320-C6,C8, C14 and Fixed inlet optional.
- * Protection: Over Load/Over Voltage/Over Current/Over Temp/Short-Circuit.
- * LED indicator show work status
- * Meet Energy Efficiency VI, Comply with CEC VI, DOE VI.
- * Comply With The Newest Safety Standard: UL62368, EN62368, IEC62368, IEC60950, IEC61558, IEC60335.
- * Brand Power Cord and DC Wire matched our products.
- * Customized Label and DC connector.




Electric Parameter:

DC Output	Output Voltage	12V	15V	18V	19V	20V	24V	28V	30V	32V	36V	38V	42V	48V	58V	60V	62V	70V	72V	
	Voltage Tolerance	±5%	±5%	±5%	±4%	±4%	±4%	±4%	±4%	±4%	±4%	±4%	±3%	±3%	±3%	±3%	±3%	±3%	±3%	
	Rated Current	8.5A	7.5A	6A	6A	5.5A	5.5A	4.5A	4.5A	4A	3.5A	3.5A	3A	2.7A	2.2A	2.2A	2A	1.7A	1.7A	
	Output Current	0-8.5A	0-7.5A	0-6A	0-6A	0-5.5A	0-5.5A	0-4.5A	0-4.5A	0-4A	0-3.5A	0-3.5A	0-3A	0-2.7A	0-2.2A	0-2.2A	0-2A	0-1.7A	0-1.7A	
	Ripple and Noise:	<200mVp-p																		
	LED Indicator	Green light when work																		
AC Input	Input Voltage Range	90~264Vac																		
	Rated Input Voltage:	100-240Vac																		
	Frequency Range:	47~62hz																		
	Input Current Max:	2.5A																		
	Inrush Current:	35A Max/240V																		
	Efficiency Min	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%	88%
	No load Input Power	≤0.21W																		
Leakage Current:	<0.25mA/240V																			
Protection	Over Load	When output power between 110%-135% of rated output power, turns to Hiccup mode.																		
	Over Voltage	When output voltage between 110%-135% of rated output voltage, turns to Hiccup mode.																		
	Over Current	Hiccup mode, recovers automatically after fault condition is removed																		
	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed																		
Environment	Operating Temp:	0℃~+45℃																		
	Storage Temp:	-30℃~+70℃																		
	Relative Humidity:	10%~90%																		
	Vibration and Shock	Meet MIL-STD-810D																		
Safety	Safety Standard	IEC62368, IEC60065, IEC60950, IEC61558, IEC60335																		
	EMC/EMI	Meet FCC CLASS B, EN55022 CLASS B.																		
	EMS	EN61000—4—2/3/4/5																		
	Drop Testing	3 drops from 1 m height on a hard wooden surface																		
Life Time	MTBF	50000 Hours																		
	Warranty	3 years																		
Dimension	L151*W61*H39.2mm																			
Drawing	See next page																			
Packing	42pcs/CTN, CTN size:L40*W34*H34CM																			
Color	Black or White																			

Drawing(mm):

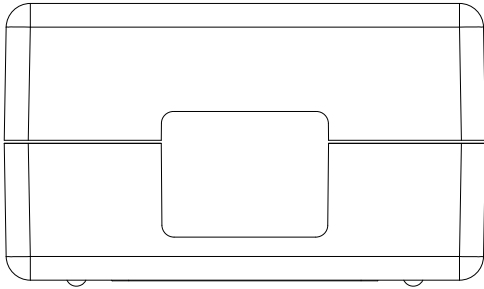


AC Inlet Type	IEC 320-C6	IEC 320-C14	IEC 320-C8
AC入力コネクタ			
AC輸入類型			<input checked="" type="checkbox"/>

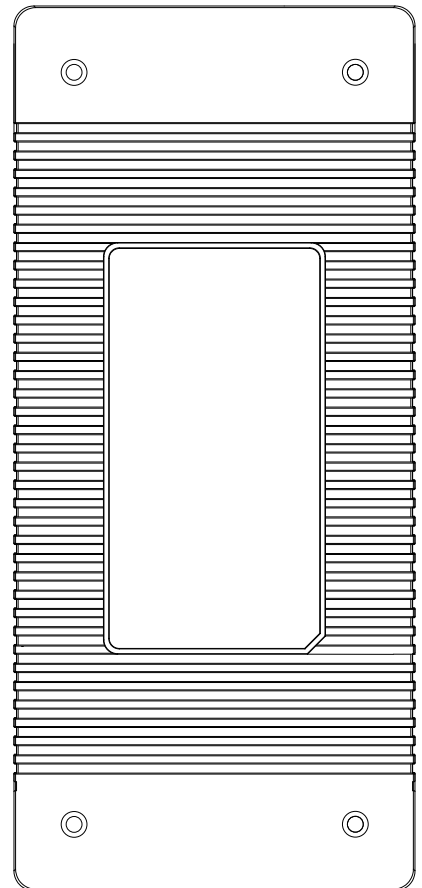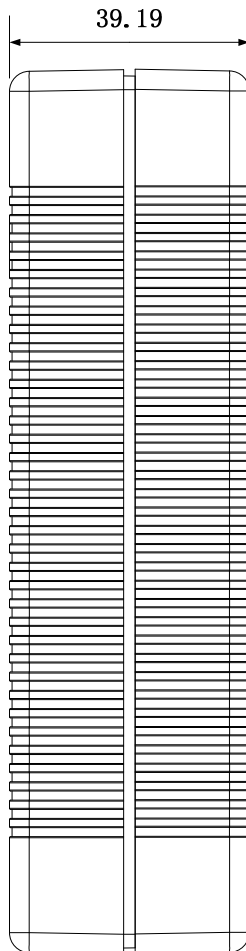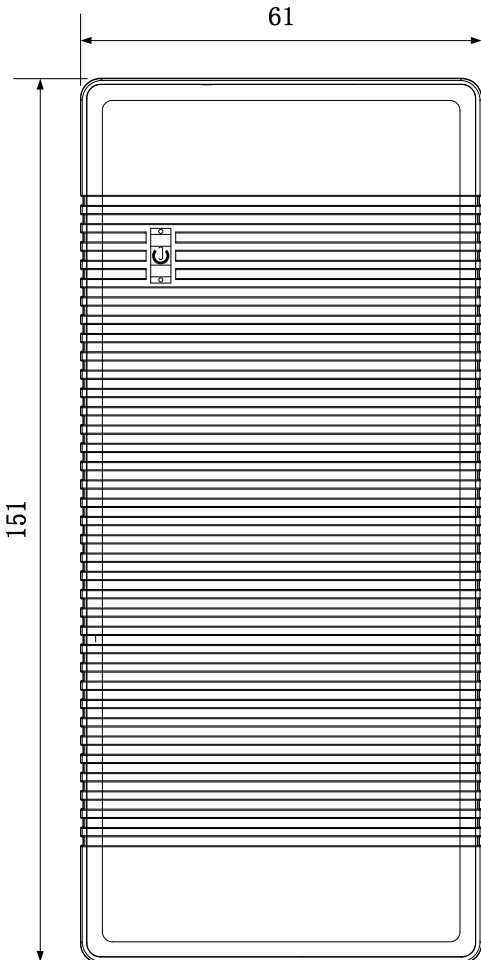

Model List:

Model Name instruction:

E.G.: XSG xxx yyyy zz

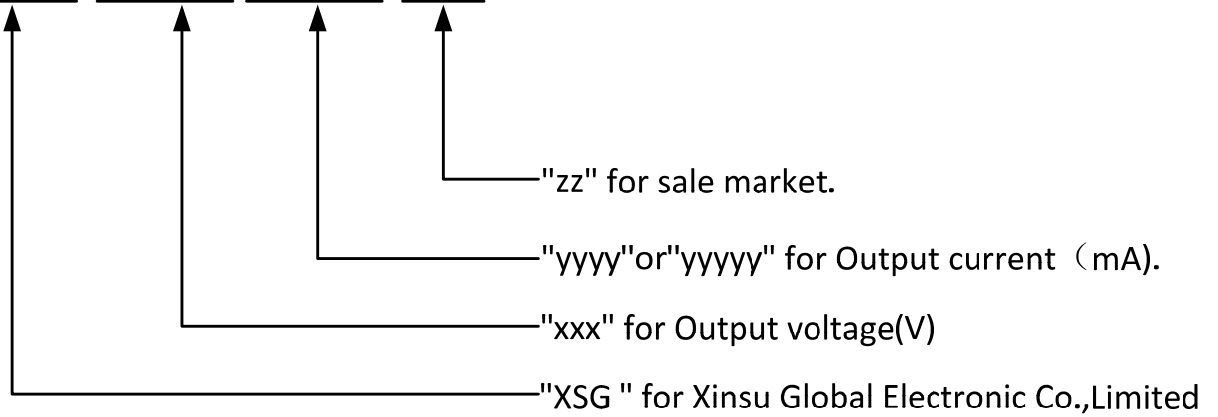

Model No	AC Input	Power Rate	Output Voltage(V)	Output Current(mA)
XSG0508000	100 ~ 240	40.0	5	8000
XSG0508500	100 ~ 240	42.5	5	8500
XSG0509000	100 ~ 240	45.0	5	9000
XSG0608000	100 ~ 240	48.0	6	8000
XSG0608500	100 ~ 240	51.0	6	8500
XSG0609000	100 ~ 240	54.0	6	9000
XSG0658000	100 ~ 240	52.0	6.5	8000
XSG0608500	100 ~ 240	55.3	6.5	8500
XSG0659000	100 ~ 240	58.5	6.5	9000
XSG0728000	100 ~ 240	57.6	7.2	8000
XSG0728500	100 ~ 240	61.2	7.2	8500

XSG0729000	100 ~ 240	64.8	7.2	9000
XSG0738000	100-240	58.4	7.3	8000
XSG0738500	100-240	62.1	7.3	8500
XSG0739000	100-240	65.7	7.3	9000
XSG0758000	100 ~ 240	60.0	7.5	8000
XSG0758500	100 ~ 240	63.8	7.5	8500
XSG0759000	100 ~ 240	67.5	7.5	9000
XSG0848000	100 ~ 240	67.2	8.4	8000
XSG0848500	100 ~ 240	71.4	8.4	8500
XSG0849000	100 ~ 240	75.6	8.4	9000
XSG0908000	100 ~ 240	72.0	9	8000
XSG0908500	100 ~ 240	76.5	9	8500
XSG0909000	100 ~ 240	81.0	9	9000
XSG1007500	100 ~ 240	75.0	10	7500
XSG1008000	100 ~ 240	80.0	10	8000
XSG1008500	100 ~ 240	85.0	10	8500
XSG1107500	100 ~ 240	82.5	11	7500
XSG1108000	100 ~ 240	88.0	11	8000
XSG1207500	100 ~ 240	90.0	12	7500
XSG1208000	100 ~ 240	96.0	12	8000
XSG1267500	100 ~ 240	94.5	12.6	7500

XSG1268000	100 ~ 240	100.8	12.6	8000
XSG1307200	100 ~ 240	93.6	13	7200
XSG1307500	100 ~ 240	97.5	13	7500
XSG1308000	100 ~ 240	104.0	13	8000
XSG1357500	100 ~ 240	101.3	13.5	7500
XSG1358000	100 ~ 240	108.0	13.5	8000
XSG1407000	100 ~ 240	98.0	14	7000
XSG1407200	100 ~ 240	100.8	14	7200
XSG1407500	100 ~ 240	105.0	14	7500
XSG1408000	100 ~ 240	112.0	14	8000
XSG1507000	100 ~ 240	105.0	15	7000
XSG1507500	100 ~ 240	112.5	15	7500
XSG1606300	100 ~ 240	100.8	16	6300
XSG1606500	100 ~ 240	104.0	16	6500
XSG1607000	100 ~ 240	112.0	16	7000
XSG1626000	100 ~ 240	97.2	16.2	6000
XSG1626500	100 ~ 240	105.3	16.2	6500
XSG1627000	100 ~ 240	113.4	16.2	7000
XSG1686500	100 ~ 240	109.2	16.8	6500
XSG1687000	100 ~ 240	117.6	16.8	7000
XSG1706000	100 ~ 240	102.0	17	6000

XSG1706500	100 ~ 240	110.5	17	6500
XSG1707000	100 ~ 240	119.0	17	7000
XSG1806000	100 ~ 240	108.0	18	6000
XSG1806500	100 ~ 240	117.0	18	6500
XSG1807000	100 ~ 240	126.0	18	7000
XSG1835500	100 ~ 240	100.7	18.3	5500
XSG1836000	100 ~ 240	109.8	18.3	6000
XSG1836500	100 ~ 240	119.0	18.3	6500
XSG1905500	100 ~ 240	104.5	19	5500
XSG1906000	100 ~ 240	114.0	19	6000
XSG1906320	100 ~ 240	120.1	19	6320
XSG1906500	100 ~ 240	123.5	19	6500
XSG1955500	100 ~ 240	107.3	19.5	5500
XSG1956000	100 ~ 240	117.0	19.5	6000
XSG2005000	100 ~ 240	100.0	20	5000
XSG2005500	100 ~ 240	110.0	20	5500
XSG2006000	100 ~ 240	120.0	20	6000
XSG2105000	100 ~ 240	105.0	21	5000
XSG2105500	100-240	115.5	21	5500
XSG2205000	100 ~ 240	110.0	22	5000
XSG2205500	100-240	121.0	22	5500

XSG2254500	100 ~ 240	101.3	22.5	4500
XSG2255000	100 ~ 240	112.5	22.5	5000
XSG2255500	100-240	123.8	22.5	5500
XSG2404500	100 ~ 240	108.0	24	4500
XSG2405000	100 ~ 240	120.0	24	5000
XSG2524500	100 ~ 240	113.4	25.2	4500
XSG2525000	100 ~ 240	126.0	25.2	5000
XSG2554000	100 ~ 240	102.0	25.5	4000
XSG2554500	100 ~ 240	114.8	25.5	4500
XSG2555000	100 ~ 240	127.5	25.5	5000
XSG2704000	100 ~ 240	108.0	27	4000
XSG2704500	100 ~ 240	121.5	27	4500
XSG2804000	100 ~ 240	112.0	28	4000
XSG2804500	100 ~ 240	126.0	28	4500
XSG2903500	100 ~ 240	101.5	29	3500
XSG2904000	100 ~ 240	116.0	29	4000
XSG2904500	100 ~ 240	130.5	29	4500
XSG2923500	100 ~ 240	102.2	29.2	3500
XSG2924000	100 ~ 240	116.8	29.2	4000
XSG2924500	100 ~ 240	131.4	29.2	4500
XSG2943500	100 ~ 240	102.9	29.4	3500

XSG2944000	100 ~ 240	117.6	29.4	4000
XSG2944500	100 ~ 240	132.3	29.4	4500
XSG3003500	100 ~ 240	105.0	30	3500
XSG3004000	100 ~ 240	120.0	30	4000
XSG3004500	100 ~ 240	135.0	30	4500
XSG3203250	100 ~ 240	104.0	32	3250
XSG3203500	100 ~ 240	112.0	32	3500
XSG3204000	100 ~ 240	128.0	32	4000
XSG3303000	100 ~ 240	99.0	33	3000
XSG3303250	100 ~ 240	107.3	33	3250
XSG3303500	100 ~ 240	115.5	33	3500
XSG3304000	100 ~ 240	132.0	33	4000
XSG3363000	100 ~ 240	100.8	33.6	3000
XSG3363250	100 ~ 240	109.2	33.6	3250
XSG3363500	100 ~ 240	117.6	33.6	3500
XSG3364000	100 ~ 240	134.4	33.6	4000
XSG3403000	100 ~ 240	102.0	34	3000
XSG3403250	100 ~ 240	110.5	34	3250
XSG3403500	100 ~ 240	119.0	34	3500
XSG3503000	100 ~ 240	105.0	35	3000
XSG3503250	100 ~ 240	113.8	35	3250

XSG3503500	100 ~ 240	122.5	35	3500
XSG3603000	100 ~ 240	108.0	36	3000
XSG3603500	100 ~ 240	126.0	36	3500
XSG3653000	100 ~ 240	109.5	36.5	3000
XSG3653500	100 ~ 240	127.8	36.5	3500
XSG3783000	100 ~ 240	113.4	37.8	3000
XSG3783500	100 ~ 240	132.3	37.8	3500
XSG3803000	100 ~ 240	114.0	38	3000
XSG3803500	100 ~ 240	133.0	38	3500
XSG4022500	100 ~ 240	100.5	40.2	2500
XSG4023000	100 ~ 240	120.6	40.2	3000
XSG4202500	100 ~ 240	105.0	42	2500
XSG4203000	100 ~ 240	126.0	42	3000
XSG4252500	100 ~ 240	106.3	42.5	2500
XSG4252750	100 ~ 240	116.9	42.5	2750
XSG4253000	100 ~ 240	127.5	42.5	3000
XSG4302500	100 ~ 240	107.5	43	2500
XSG4302750	100 ~ 240	118.3	43	2750
XSG4303000	100 ~ 240	129.0	43	3000
XSG4322500	100 ~ 240	108.0	43.2	2500
XSG4322750	100 ~ 240	118.8	43.2	2750

XSG4323000	100 ~ 240	129.6	43.2	3000
XSG4382500	100 ~ 240	109.5	43.8	2500
XSG4382700	100 ~ 240	118.3	43.8	2700
XSG4383000	100 ~ 240	131.4	43.8	3000
XSG4402500	100 ~ 240	110.0	44	2500
XSG4402700	100 ~ 240	118.8	44	2700
XSG4403000	100 ~ 240	132.0	44	3000
XSG4502500	100 ~ 240	112.5	45	2500
XSG4502650	100 ~ 240	119.3	45	2650
XSG4503000	100 ~ 240	135.0	45	3000
XSG4602500	100 ~ 240	115.0	46	2500
XSG4602750	100 ~ 240	126.5	46	2750
XSG4622500	100 ~ 240	115.5	46.2	2500
XSG4622750	100 ~ 240	127.1	46.2	2750
XSG4752500	100 ~ 240	118.8	47.5	2500
XSG4752750	100 ~ 240	130.6	47.5	2750
XSG4802100	100 ~ 240	100.8	48	2100
XSG4802250	100 ~ 240	108.0	48	2250
XSG4802500	100 ~ 240	120.0	48	2500
XSG4802750	100 ~ 240	132.0	48	2750
XSG5042000	100 ~ 240	100.8	50.4	2000

XSG5042500	100 ~ 240	126.0	50.4	2500
XSG5102000	100 ~ 240	102.0	51	2000
XSG5102500	100 ~ 240	127.5	51	2500
XSG5112000	100 ~ 240	102.2	51.1	2000
XSG5112500	100 ~ 240	127.8	51.1	2500
XSG5462000	100 ~ 240	109.2	54.6	2000
XSG5482000	100 ~ 240	109.6	54.8	2000
XSG5502000	100 ~ 240	110.0	55	2000
XSG5602000	100 ~ 240	112.0	56	2000
XSG5801750	100 ~ 240	101.5	58	1750
XSG5802000	100 ~ 240	116.0	58	2000
XSG5841750	100 ~ 240	102.2	58.4	1750
XSG5842000	100 ~ 240	116.8	58.4	2000
XSG5842250	100 ~ 240	131.4	58.4	2250
XSG5881750	100 ~ 240	102.9	58.8	1750
XSG5882000	100 ~ 240	117.6	58.8	2000
XSG5882250	100 ~ 240	132.3	58.8	2250
XSG6001750	100 ~ 240	105.0	60	1750
XSG6002000	100 ~ 240	120.0	60	2000
XSG6002250	100 ~ 240	135.0	60	2250
XSG6201750	100 ~ 240	108.5	62	1750

XSG6202000	100 ~ 240	124.0	62	2000
XSG6301750	100 ~ 240	110.3	63	1750
XSG6302000	100 ~ 240	126.0	63	2000
XSG6481750	100 ~ 240	113.4	64.8	1750
XSG6482000	100 ~ 240	129.6	64.8	2000
XSG6571750	100 ~ 240	115.0	65.7	1750
XSG6572000	100 ~ 240	131.4	65.7	2000
XSG6721500	100 ~ 240	100.8	67.2	1500
XSG6721750	100 ~ 240	117.6	67.2	1750
XSG6722000	100 ~ 240	134.4	67.2	2000
XSG6751500	100 ~ 240	101.3	67.5	1500
XSG6751750	100 ~ 240	118.1	67.5	1750
XSG6752000	100 ~ 240	135.0	67.5	2000
XSG6941500	100 ~ 240	104.1	69.4	1500
XSG6941750	100 ~ 240	121.5	69.4	1750
XSG7001500	100 ~ 240	105.0	70	1500
XSG7001750	100 ~ 240	122.5	70	1750
XSG7141500	100 ~ 240	107.1	71.4	1500
XSG7141750	100 ~ 240	125.0	71.4	1750
XSG7201500	100 ~ 240	108.0	72	1500
XSG7201750	100 ~ 240	126.0	72	1750

XSG7251500	100 ~ 240	108.8	72.5	1500
XSG7251750	100 ~ 240	126.9	72.5	1750
XSG7301500	100 ~ 240	109.5	73	1500
XSG7301750	100 ~ 240	127.8	73	1750