



Safety Standard:

1. IEC/EN 62368-1
2. IEC/EN/J 60335-1
3. UL/cUL 1012

Feature:

- *Designed in USA, Made in China
- *Global Certificates.


- * Case Material: PC, Sabic brand, Fireproof class: UL94V-0.
- * Fanless Design.
- * Fully sealed by Screw.
- * Waterproof Class: >IP20.
- * AC socket: IEC320-C14
- * Protection: Over load/over voltage/over current/over temp/short circuit
- * LED indicator show work status, Red for Charging, Green for Charged full.
- * Meet Energy effective level VI, meet CEC VI, DOE VI, CoC V, GEMS. PF ≥ 0.94 , Effective $\geq 93\%$
- * Comply with: IEC/EN62368-1, UL62368 and CAS C22.2#107.2
- * Brand AC power cord and DC cable matched our power supply.
- * Support customized label and DC connector.

電性參數:

DC output	Output Voltage (V) (12V-87V)	12	15	18	19	20	24	28	30	32	36	38	42	48	58	60	70	72	75	80	82	84	87	
	Load regulation(V)	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2	
	Rated current(A)	18	16	14	13.5	13	11.5	10	9.5	9	8.3	7.9	7.1	6.2	5.1	5.0	4.2	4.1	4.0	4.0	3.5	3.5	3.5	
	Output current(A)	0-18	0-16	0-14	0-13.5	0-13	0-11.5	0-10	0-9.5	0-9	0-8.3	0-7.9	0-7.1	0-6.2	0-5.1	0-5.0	0-4.2	0-4.1	0-4.0	0-4.0	0-4.0	0-4.0	0-4.0	
	Ripple and noise(mV)	<250mVp-p																						
	LED light	Green																						
AC input	AC input voltage(V)	90~264V 交流																						
	Rated input voltage(V):	100-240V 交流																						
	Frequency Range:	50~60hz																						
	Input current	5A max																						
	Inrush Current:	40A Max/240V																						
	Effective min	90%																						
	No load consumption	$\leq 0.5W$																						
leakage current	CLASS I: <0.75mA																							
Protection	Over load protection	When output voltage between 110%-135% of rated output voltage, turns to Hiccup mode																						
	Over voltage protection	When output voltage between 110%-135% of rated output voltage, turns to Hiccup mode																						
	Over current protection	When output voltage between 110%-135% of rated output voltage, turns to Hiccup mode																						
	Short circuit	Hiccup mode, recovers automatically after fault condition is removed																						
Environment	Operating Temp:	0°C ~ +45°C																						
	Storage Temp:	-30°C ~ +70°C																						
	Relative Humidity:	10% ~ 90%																						
	Vibration and Shock	Meet MIL-STD-810D																						

Certificate	Safety standard	IEC/EN/J 62368, EN/ 60335-1,UL/cUL62368-1
	EMC STANDARDS	FCC CLASS B,EN55032,EN55035,EN55014-1,EN55014-2
	EMS	EN61000 - 4 - 2/3/4/5
Life Time	MTBF	50000 hours
	Warranty	2 years
Size	L236*W87*H46mm	
Drawing	See next page	
Packing	10pcs/ctn	
Color	Black , White or Customized	

Dimension (mm):

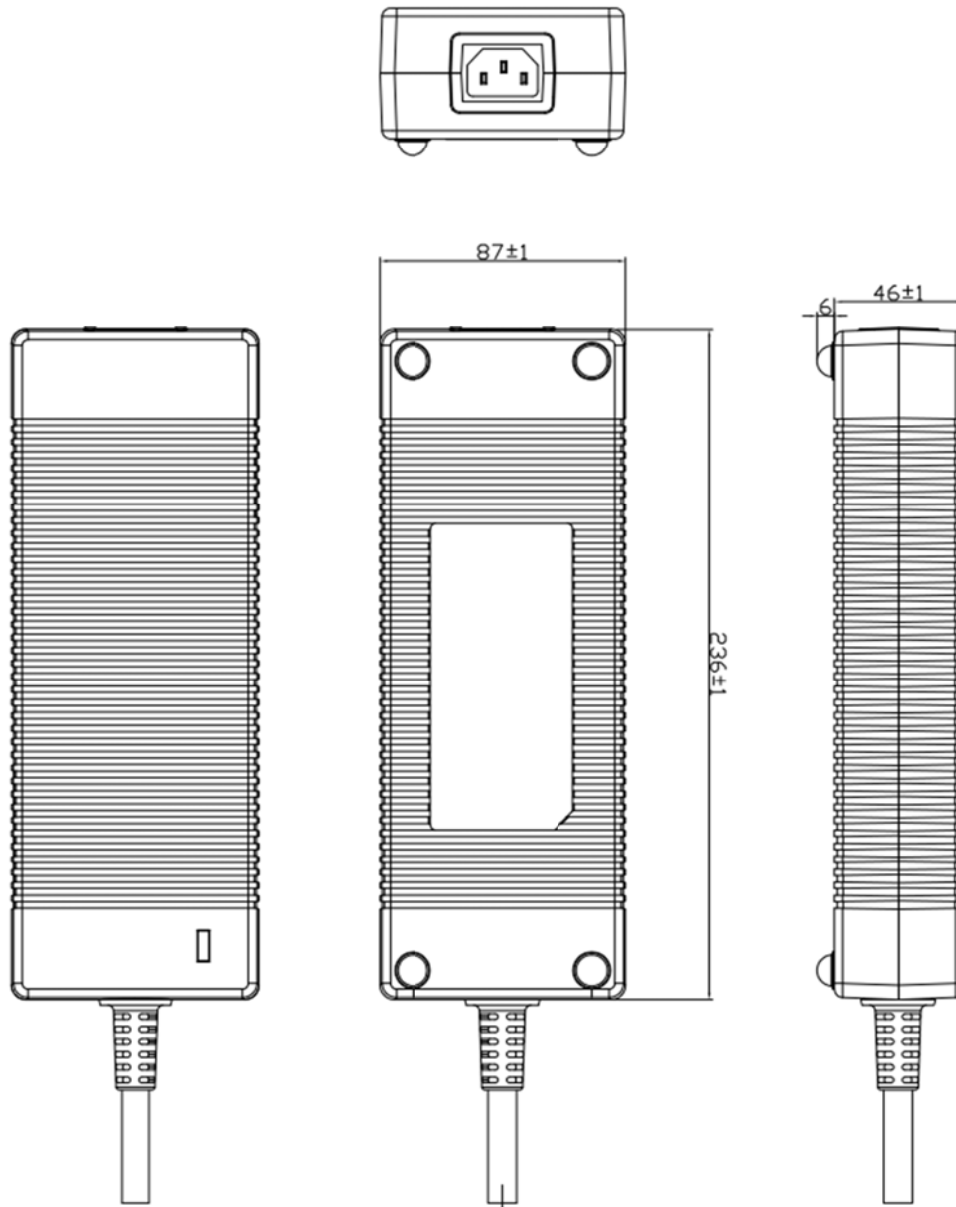

Model No:

Model Name Rules:

E.G.: XSG xxx yyyy zz

